


MS3116F24-61S or Equivalent

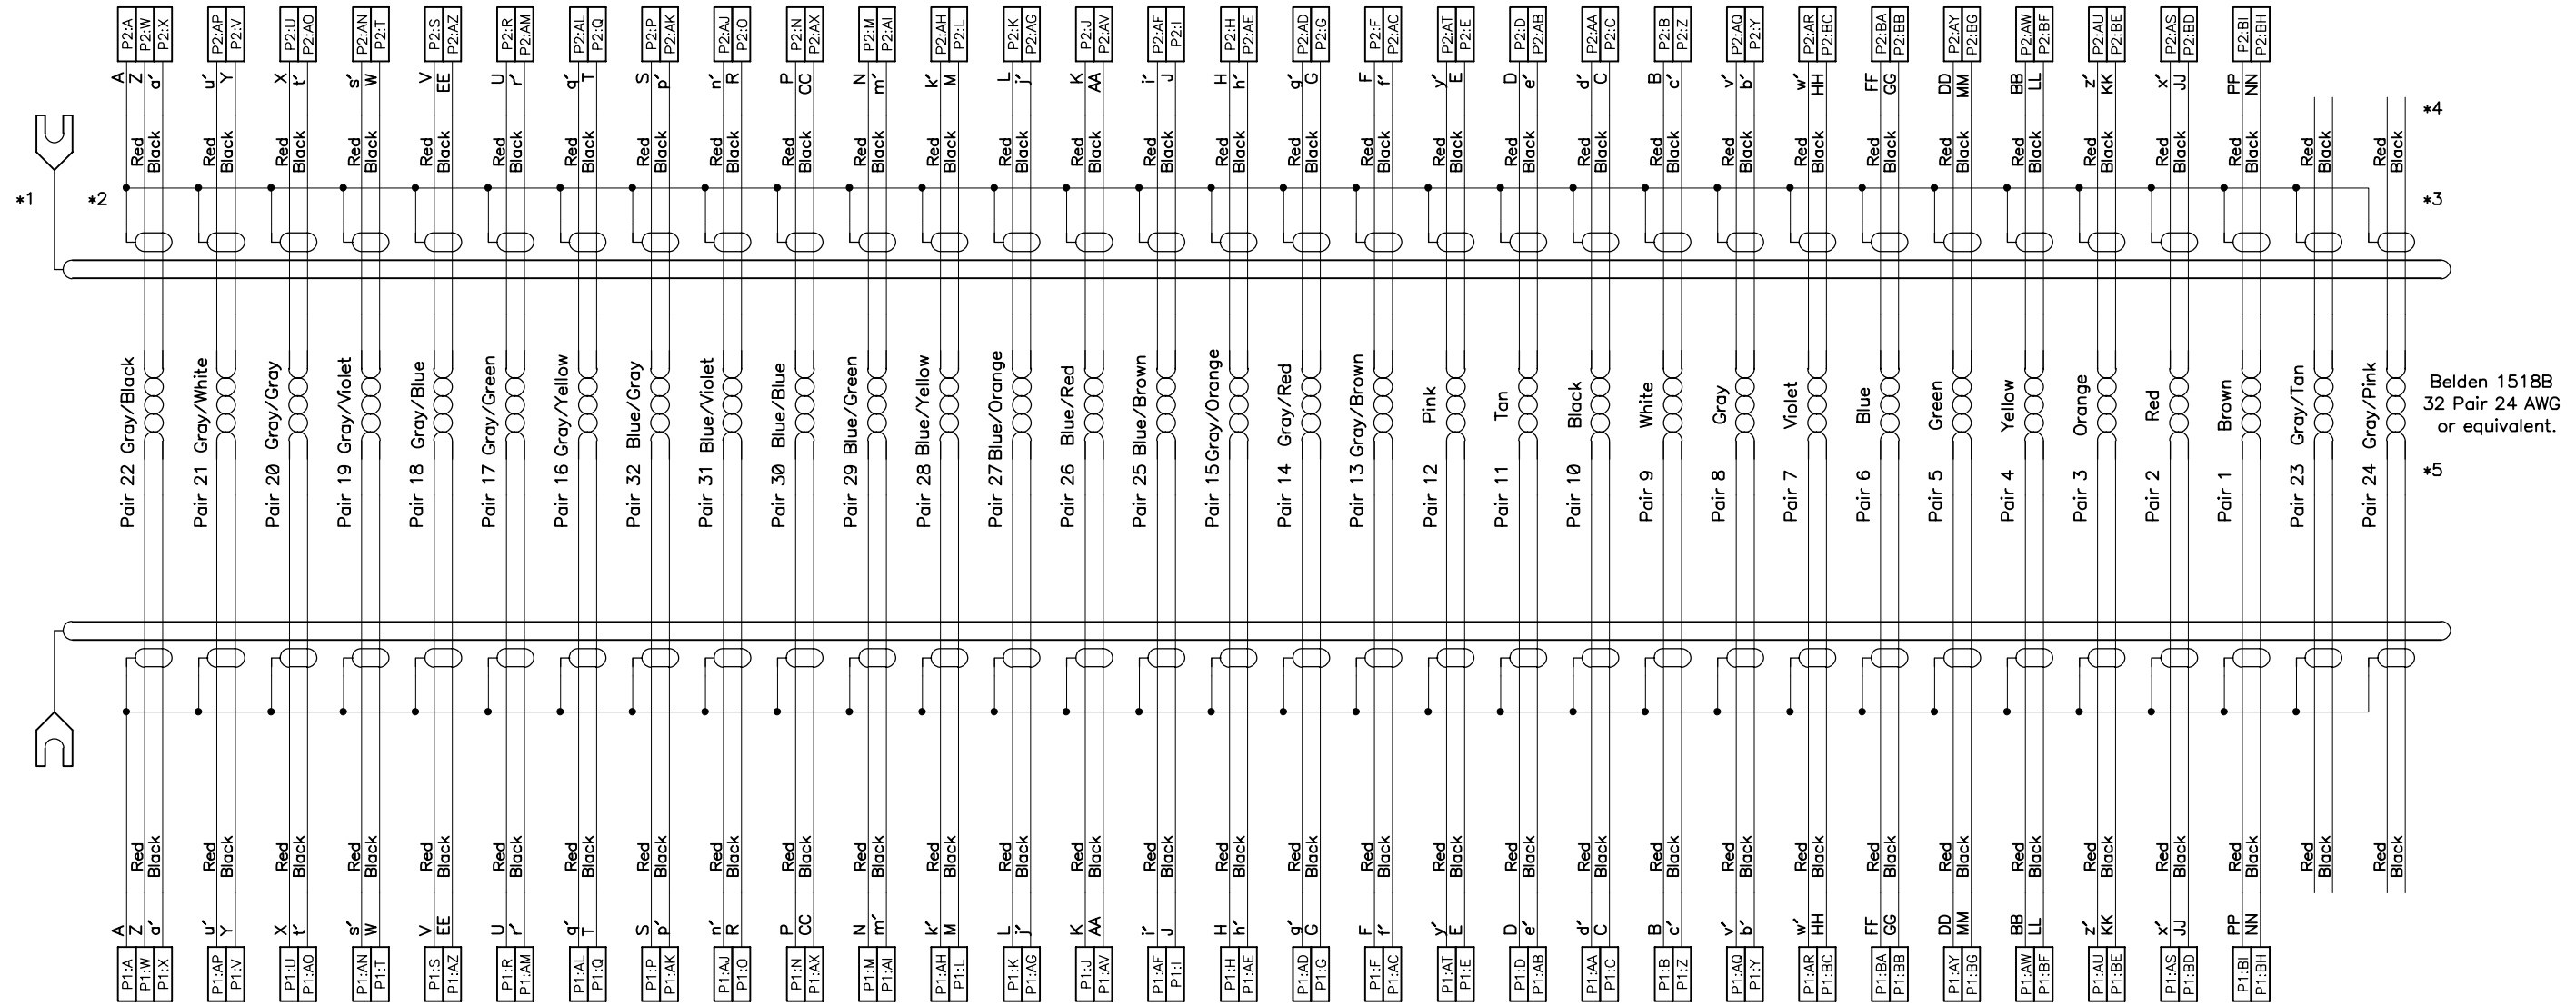

MS3116F24-61S or Equivalent

- \*1: Overall shield drain wire connected to #8 spade lug for termination at chassis. Leave enough wire length to reach chassis mounting post.
- \*2: All twisted pair drain wires connected together, isolated from overall shield, and attached to pin A. Use heat shrink tubing to electrically isolate individual drain terminations from overall shield.
- \*3: Terminate drain wires of unused pairs with other twisted pair drain wires to facilitate using these for repairs.
- \*4: Cover unused pair wire ends with heatshrink tubing.
- \*5: Pair arrangement chosen to simplify cable wiring.

UNIVERSITY OF CALIFORNIA LICK OBSERVATORY		CCD CABLES FOR SDSU2 61 PIN	
DES'N BY: L. BRESEE	ORIGIN DATE: 07-26-97	DWG. NO.	NUM. 1 OF 1
Last SN 0014	MODIFY DATE: 3-25-99	EL-3186-2W	
PATH: \\DEIMOS\SDSUCCD2\61CAB.SCH			

REVISION

3-25-99 CHANGED EL NUMBER FROM EL-3173 TO EL-3186