



PIN	SIGNAL
A	SPARE1
B	-15V ANALOG
C	ANALOG GROUND
D	COMMON TEMP DIODE ANODE
E	UTILITY BRD HEATER PWR
F	UTILITY SUPPORT BRD +5V
G	ANALOG SWITCH ENABLE
H	+5V DIGITAL
J	DIGITAL GROUND
K	SPARE4
L	ANALOG GROUND
M	+15V ANALOG
N	SPARE2
P	COMMON TEMP DIODE RTN
R	UTILITY BRD HEATER RTN
S	SPARE3
T	SPARE5

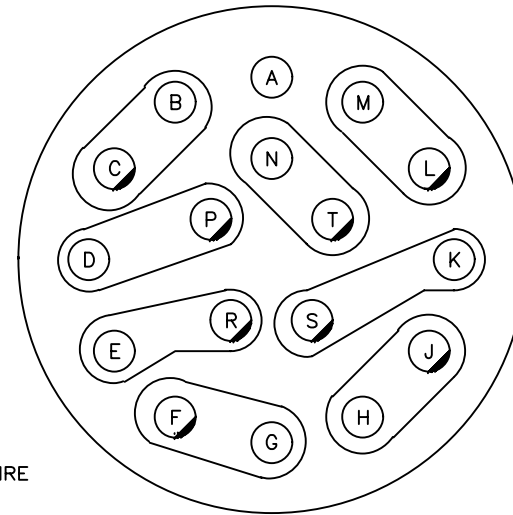

 DENOTES THE BLACK WIRE OF THE TWISTED PAIR

BENDIX #

-
-
AN3057-12

AMPHENOL #

MS3102A-20-29P PANEL MOUNT, MALE
MS3106A-20-29S CABLE MOUNT, FEMALE
MS3057-12 W/ BOOT CABLE MOUNT, FEMALE

(BACK VIEW)
(FRONT VIEW)

UNIVERSITY OF CALIFORNIA
LICK OBSERVATORY

17-PIN CABLE
CONNECTOR SIGNALS

REVISION

10/22/97 added pair designation

DES'N BY: Chris Wright

ORIGIN DATE: 6/11/97

DWG. NO.

NUM. 1 OF 1

DRAWN BY:

MODIFY DATE: 10/22/97

PATH: DEIMOS\SDSUCCD2\CONN17.SCH

REV. B

EL-3173